



QUALITY SCREENS BUILT TOUGH!



Fab Tec screens are known for simplicity in design and strength in construction. We combine the best design features with high quality, readily available components you can depend on, easily maintain, and reap the returns.

Pro 4 x 8 Incline Screen

- Available in electric or hydraulic power configurations.
- 1/4" Plate side walls.
- Gr 8 bolted screen decks, constructed of 3"x2"x 3/8" angle top deck and 2"x2" rectangular tubing bottom deck, with 1/2"x3" flat bar crown bars.
- AR lined discharge lips.
- AR lined feed box.
- Firestone Air mounts.
- 80 MM Torrington spherical roller bearings designed for shaker screens.
- 6" x 1/2" wall tube center support with 1" thick bolt-flanges.
- FAB TEC cartilage style bearing housings, with 5/8" wall.
- Eccentrics with add on weights to adjust throw.
- 4" x 6" tube sub frame .
- Standard side tension formed clamp bars and 1/2" crown bar rubbers.




Options

- 4 Bar Wash System with 7 spray nozzles per bar, 1 1/2" brass gate valves, water manifold with 3" inlet, and clean-up hose hook-up. (Requires 140 gpm at 40 psi water source)
- End-tension screen deck.
- Skid structure with or without under-screen conveyor.



SKID MOUNTED SCREENS

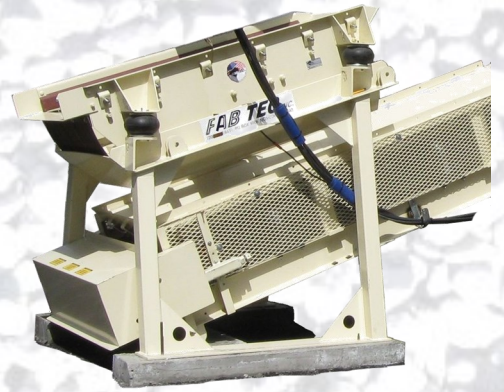

Skid Features & Options

- Heavy duty structure on movable skid.
- Folding walkways for shipping.
- With or without under-screen conveyor.
- Wet Screen hopper with flume.
- Separate or common product chute.

